

Retrofit Cartridges for Competitive Systems



The CunoOCS® line of filtration products are carefully designed to protect beverage equipment, provide consistent beverage quality, and ensure seamless beverage service.

The CunoOCS retrofit cartridges upgrade the performance of existing competitive systems with the same premium performance and design characteristics as the Series 500 and 700.

The cartridge design offers simple changeouts while minimizing corrosion potential often seen in metallic housings.

The sanitary quick change design minimizes contamination of the filtration media, while the compact footprint allows the unit to be installed snugly behind the beverage unit or neatly under a cabinet.

The housing is durable and shatter-resistant, minimizing the potential for leaks.

Units are FDA, CFR-21 compliant for use in all food and beverage applications and are 3rd party certified for design and performance.

Three (3) premium carbon technologies are available for differing water conditions.

Maximum Protection

CS-24

Capacity: 2,000 gallons (7,571 liters) or 266 cups/day*

Features

- Graded density, compressed carbon block
- 0.5 micron cyst, turbidity, fine sediment reduction
- Chlorine taste and odor reduction
- Built-in scale inhibition

Benefits

- Does not require activation
- Extends contact time for maximum chlorine and sediment reduction
- Extended protection and long life
- Enhances beverage quality over the life of the filter
- Protects equipment from the harmful effects of hard water
- Provides seamless beverage service

General Purpose

CS-14

Capacity: 2,500 gallons (9,464 liters) or 333 cups/day*

Features

- Graded density, multi-composite carbon block
- 1 micron sediment reduction
- Chlorine taste and odor reduction
- Built-in scale inhibition

Benefits

- Does not require activation
- Enhances beverage clarity
- Enhances beverage quality over the life of the filter
- Protects equipment from the harmful effects of hard water
- Provides seamless beverage service

Problem Water

CS-64

Capacity: 2,400 gallons (9,085 liters) or 320 cups/day*

Features

- Built-in 5 micron prefiltration
- Chlorine taste and odor reduction
- Built-in scale inhibition

Benefits

- Suitable for water conditions with heavy dirt load
- Reduces maintenance caused by clogged valves and orifices
- Enhances beverage quality over the life of the filter
- Protects equipment from the harmful effects of hard water
- Provides seamless beverage service

*Cups/day based on 8oz cup (237 ml), 20 day work month and 6 month changeout schedule.

Quotation for Specified CunoOCS® Water Filters


Specified Model # _____

Part # _____

Price Quoted _____

Installed on what equipment _____

Quantity Required _____

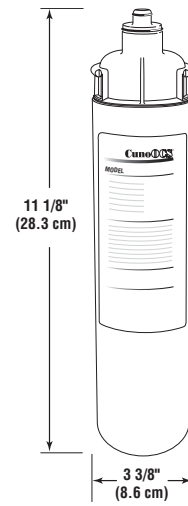

Applications/Specifications

| Model# | Part# | System Dimensions inches (cm) | Replacement Cartridge | Part# | Chlorine Taste and Odor | Scale Inhibition | Sediment Reduction | Heavy Sediment Reduction | Cyst Removal | Turbidity Reduction | Capacity Gals. (liters) | Flow Rate gpm (lpm) | Carton Wt. lbs. (kilos) | Carton Dimensions cu. ft. (cu. m) | Case Qty |
|--------|----------|--------------------------------|-----------------------|-------|-------------------------|------------------|--------------------|--------------------------|--------------|---------------------|-------------------------|---------------------|-------------------------|-----------------------------------|----------|
| CS-24 | 55896-07 | 11 1/8 x 3 3/8 (28.3 x 8.6) | Same | Same | ✓ | ✓ | ✓ | | ✓ | ✓ | 2,000 (7,571) | 1.0 (3.78) | 26 (11.8) | 1.8 (0.05) | 12 |
| CS-14 | 55896-05 | 11 1/8 x 3 3/8 (28.3 x 8.6) | Same | Same | ✓ | ✓ | ✓ | | | | 2,500 (9,464) | 1.0 (3.78) | 26 (11.8) | 1.8 (0.05) | 12 |
| CS-64 | 55891-05 | 11 1/8 x 3 3/8 (28.3 x 8.6) | Same | Same | ✓ | ✓ | | ✓ | | | 2,400 (9,085) | 1.0 (3.78) | 26 (11.8) | 1.8 (0.05) | 12 |

For cold water use only. This product is for commercial use only. All materials are FDA compliant with CFR title 21.

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts. EPA Establishment No. 070595-CT-001



CunoOCS products contain one or more of the following NSF listed head/cartridge combinations:

- CS-24/CS-24
- CS-14/CS-14
- CS-64/CS-64

Refer to the PDS sheet for the certified claims.

Distributed By:

LIMITED ONE YEAR WARRANTY

CUNO Incorporated warrants to the original purchaser-consumer that this product is free of defects in materials and workmanship. Any defect, malfunction, or other failure of the product to conform to this warranty will be remedied by CUNO.

This warranty, together with any and all warranties implied by law, shall be limited to a duration of one (1) year from the original purchase by the consumer.

This warranty does not apply to defects that result from abuse, misuse, alteration or damage not caused by CUNO. See warranty card for full details.

Service Worldwide

CUNO Pacific Pty. Ltd
P.O. Box 6767
140 Sunnyholt Road
Blacktown, N.S.W. 2148 Australia

CUNO Filtration Asia Pte. Ltd.
1 Tech Park Crescent
Tuas Tech Park
Singapore 638131

CUNO Europe S.A.
1 Boulevard de l'OLSE
95030 Cergy-Pontoise Cedex
France



CUNO K.K.
Hodogaya Station Building 6F
1-7 Iwai-cho, Hodogaya-ku
Yokohama, 240 Japan

Commercial Intertech Do Brazil - Divisão CUNO
Rua Amf Do Brazil 251
18120-000 Mairinque-Sp
Brazil



CUNO Incorporated
400 Research Parkway
Meriden, CT 06450 U.S.A.
Toll Free: 1-888-218-CUNO
Worldwide: 203-237-5541
Fax: 203-238-8701
www.cuno.com